

FICHA TÉCNICA HD - 48



Description

Suitable for a wide fitting range from Mild to Severe losses, this product is ready to match your individual requirements and budget.

What`s special?

HD - 48

- * Optimized DSP hearing aid
- * 2 channels WDRC Multi Memories Amplifier
- * 12 Bands Frequency Shaping
- * Noise Reduction
- * Feedback Cancellation
- * Memory switch
- * Low Battery Warning
- * Up to 4 listening programs



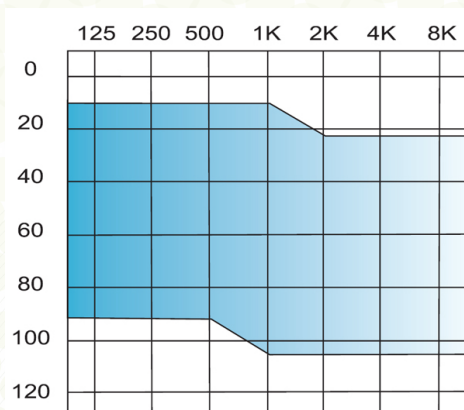
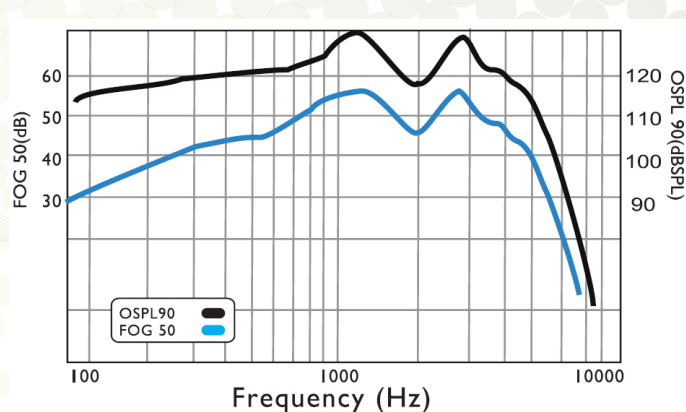
P-Tri controls

output sound level .



H-Tri controls

background noise reduction.

Fitting range**Testing diagram****Technical Data**

Technical Data	HD - 48
IEC-118-7/2005(2cc-coupler)	
Peak OSPL 90(db SPL)	130
HAF OSPL 90(db SPL)	122
Peak Gain(db)	57
HAF full on Gain(db)	48
Total Harmonic Distort:	
500Hz(%)	5
800Hz(%)	3
1600Hz(%)	3
EQ Input Noise(db)	30
Battery Current(mA)	1
T-coil	Optional
Potentiometer Features	VC
Trimmers	H+P
Memory Switch	Y
Number of Channels	2
Battery type	13A