



Description

Designed with no screw make HDP a elegant smart digital BTE. Compact, flexible and highly effective, this is a great choice for mild to moderately severe hearing loss.



Exchangeable between Earhook and Tube

HDP-243of / HDP-444of / HDP-645of /

HDP-845of

- * Optimized DSP hearing aid
- * 2/4/6/8 channels WDRC Multi Memories Amplifier
- * Wideband MPO Control
- * Adaptive Feedback Cancellation (AFC)
- * Noise Reduction


What's Special

1. No screw. HDP series is designed with no screw make the hearing aid more modern and simple.


2. Exchangeable between Earhook and Tube.

Both comfortable fit for different preference.

Fitting range

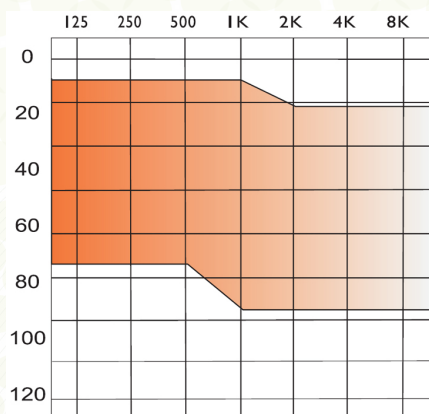

Testing diagram

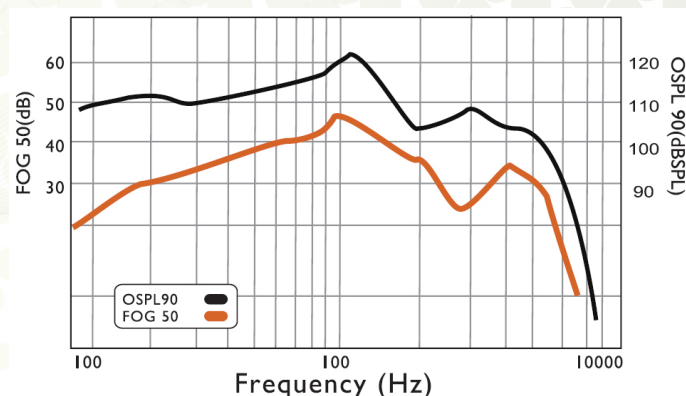

Technical Data

Technical Data	HDP - 243of	HDP - 444of	HDP - 645of	HDP - 845of
IEC-118-7/2005(2cc-coupler)				
Peak OSPL 90(db SPL)	120	120	121	121
HAF OSPL 90(db SPL)	110	110	111	111
Peak Gain(db)	43	44	45	45
HAF full on Gain(db)	30	31	32	32
Total Harmonic Distort:				
500Hz(%)	3	3	2	2
800Hz(%)	2	2	2	2
1600Hz(%)	1	1	1	1
EQ Input Noise(db)	30	30	25	25
Battery Current(mA)	1	1	1.1	1.1
T-coil	Optional	Optional	Optional	Optional
Potentiometer Features	VC	VC	VC	VC
Tinnitus Treatment	N	N	N	Y
Datalogging	N	N	N	Y
Build-in Audiometer	N	N	N	Y
Earhook/ Tube	Exchangeable	Exchangeable	Exchangeable	Exchangeable
Number of Channels	2	4	6	8
Programming cable	CS 44	CS 44	CS 44	CS 44
Battery type	13A	13A	13A	13A